


1

Intro to Javascript

Client Side Scripting

2

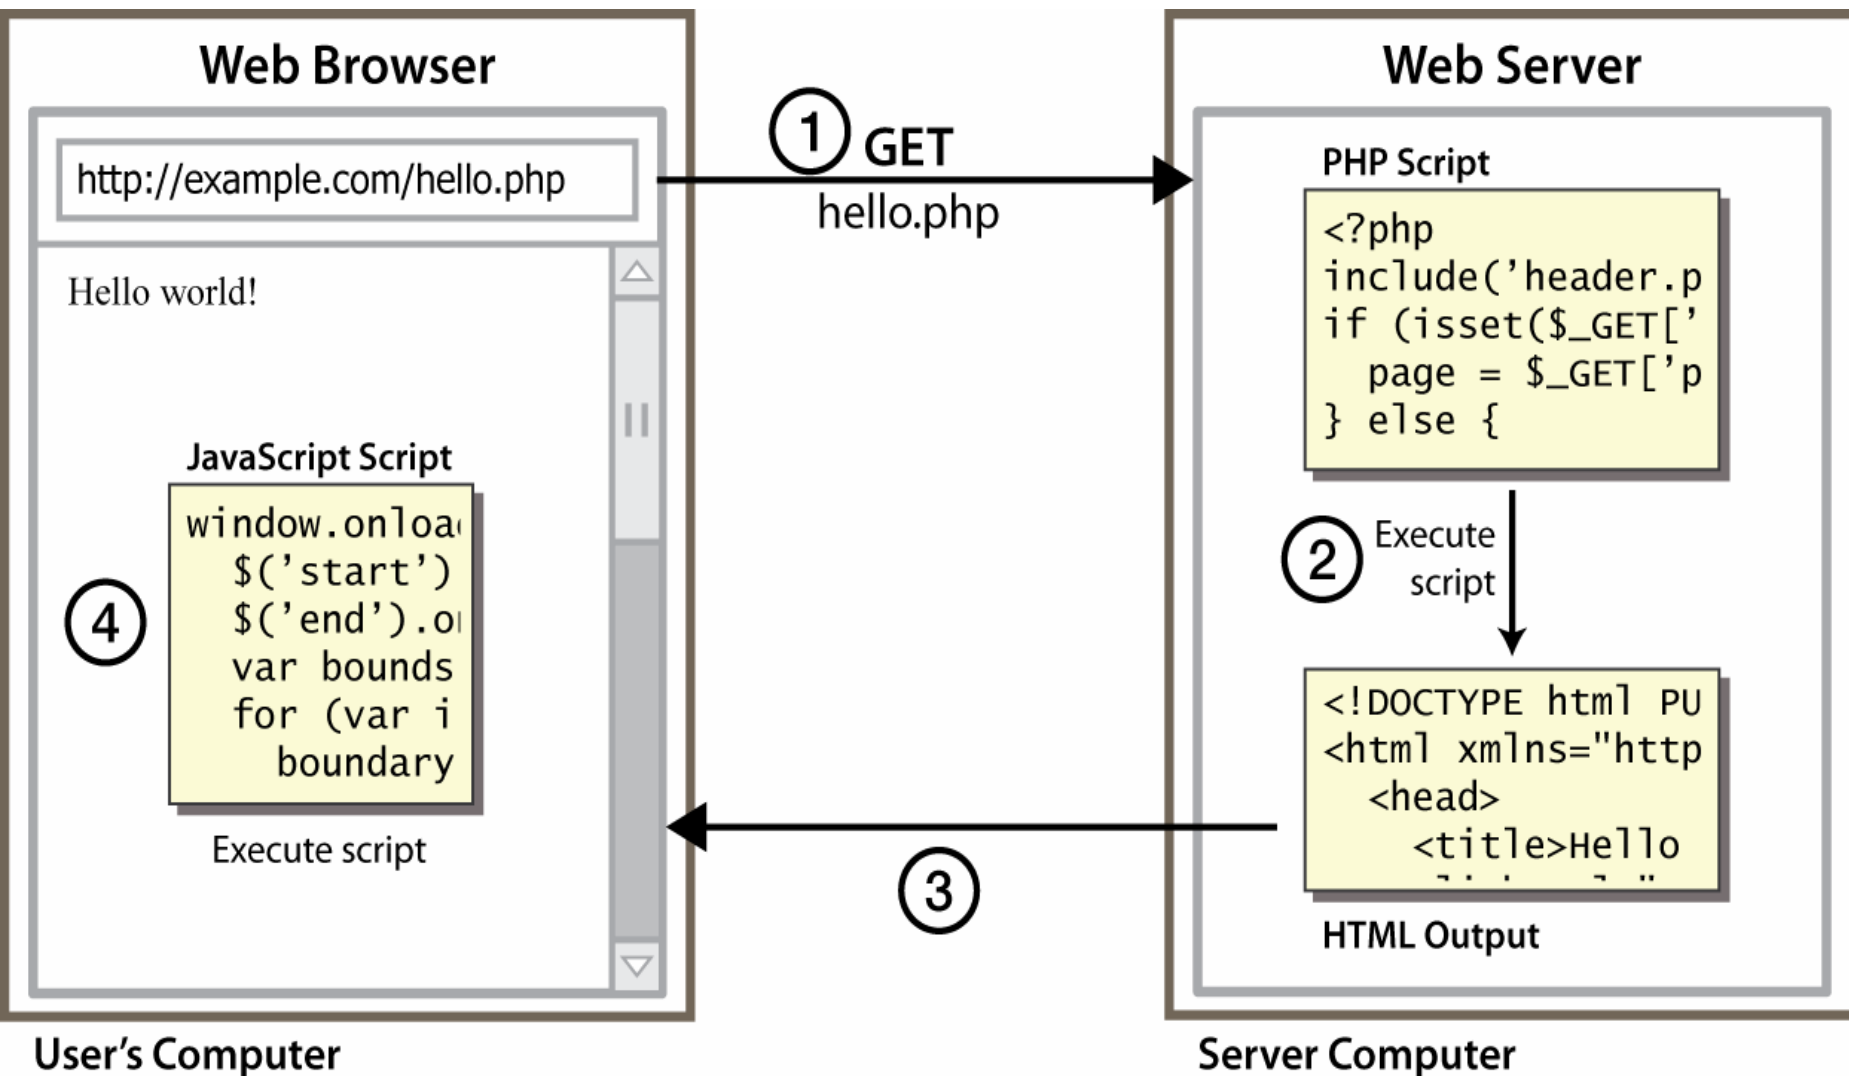

Why use client-side programming?

3

PHP already allows us to create dynamic web pages. Why also use client-side scripting?

- client-side scripting (JavaScript) benefits:
 - ▣ **usability**: can modify a page without having to post back to the server (faster UI)
 - ▣ **efficiency**: can make small, quick changes to page without waiting for server
 - ▣ **event-driven**: can respond to user actions like clicks and key presses

Why use client-side programming?

4

- server-side programming (PHP) benefits:
 - ▣ **security**: has access to server's private data; client can't see source code
 - ▣ **compatibility**: not subject to browser compatibility issues
 - ▣ **power**: can write files, open connections to servers, connect to databases, ...

What is Javascript?

5

- a lightweight programming language ("scripting language")
 - ▣ used to make web pages interactive
 - ▣ insert dynamic text into HTML (ex: user name)
 - ▣ **react to events** (ex: page load user click)
 - ▣ get information about a user's computer (ex: browser type)
 - ▣ perform calculations on user's computer (ex: form validation)

What is Javascript?

6

- a web standard (but not supported identically by all browsers)
- NOT related to Java other than by name and some syntactic similarities

Javascript vs Java

7

- interpreted, not compiled
- more relaxed syntax and rules
 - ▣ fewer and "looser" data types
 - ▣ variables don't need to be declared
 - ▣ errors often silent (few exceptions)
- key construct is the function rather than the class
 - ▣ "first-class" functions are used in many situations
- contained within a web page and integrates with its HTML/CSS content



Javascript vs Java

8



+



=



JavaScript vs. PHP

9

- similarities:
 - ▣ both are interpreted, not compiled
 - ▣ both are relaxed about syntax, rules, and types
 - ▣ both are case-sensitive
 - ▣ both have built-in regular expressions for powerful text processing

JavaScript vs. PHP

10

□ differences:

- JS is more object-oriented: noun.verb(), less procedural: verb(noun)
- JS focuses on user interfaces and interacting with a document; PHP is geared toward HTML output and file/form processing
- JS code runs on the client's browser; PHP code runs on the web server

JS <3



Linking to a JavaScript file:

script

11


```
<script src="filename" type="text/javascript"></script>
```

HTML

- script tag should be placed in HTML page's head
- script code is stored in a separate .js file
- JS code can be placed directly in the HTML file's body or head (like CSS)
 - but this is bad style (should separate content, presentation, and behavior)

Event-driven programming

12

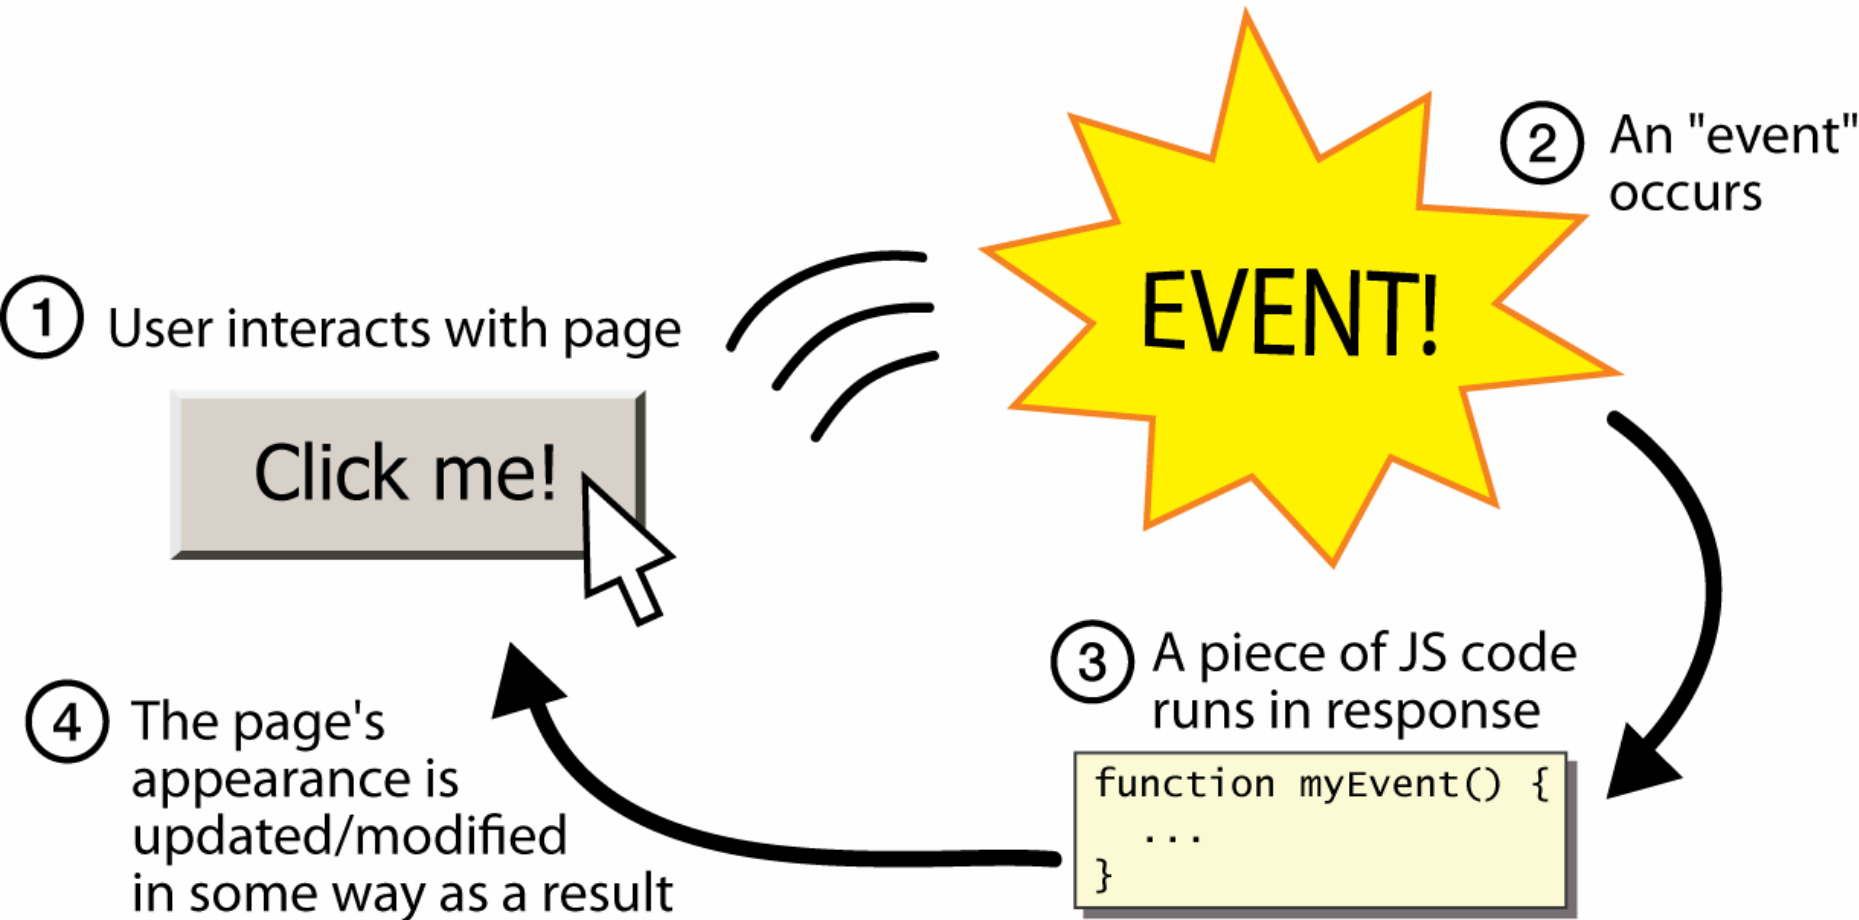


A JavaScript statement: `alert`

13

```
alert("IE6 detected. Suck-mode enabled.");
```

JS

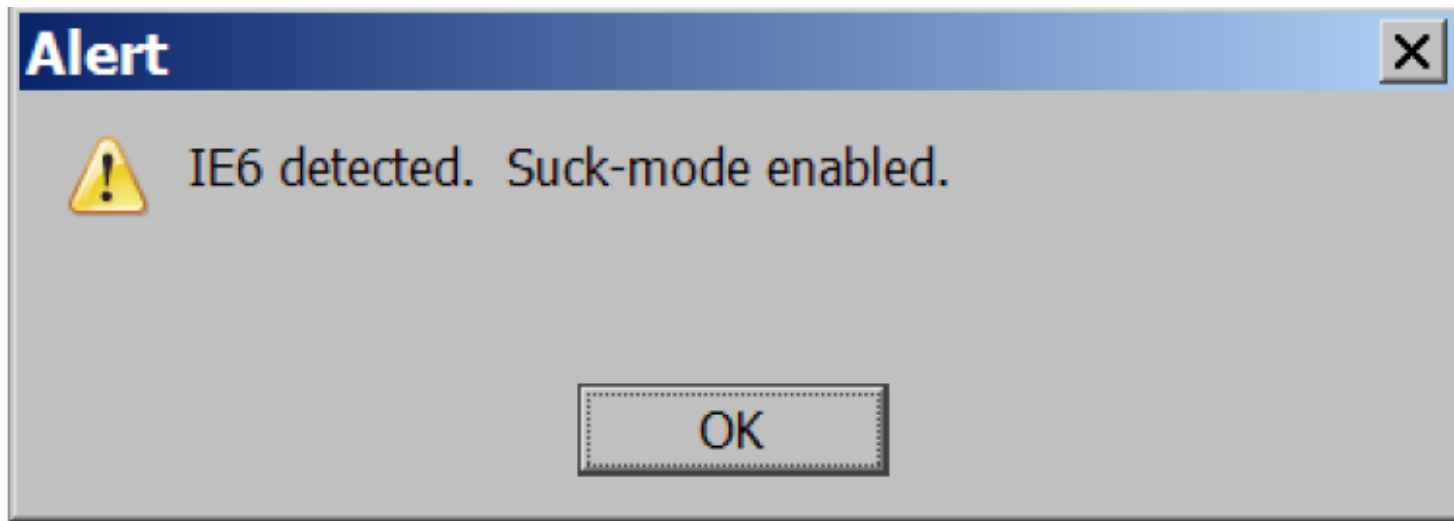

- a JS command that pops up a dialog box with a message

Event-driven programming

14

- you are used to programs start with a main method (or implicit main like in PHP)
- JavaScript programs instead wait for user actions called *events* and respond to them
- event-driven programming: writing programs driven by user events
- Let's write a page with a clickable button that pops up a "Hello, World" window...

Buttons

15

```
<button>Click me!</button>
```

HTML

- button's text appears inside tag; can also contain images
- To make a responsive button or other UI control:
 1. choose the control (e.g. button) and event (e.g. mouse 1. click) of interest
 2. write a JavaScript function to run when the event occurs
 3. attach the function to the event on the control

JavaScript functions

16

```
function name() {  
  statement ;  
  statement ;  
  ...  
  statement ;  
}
```

JS

```
function myFunction() {  
    alert("Hello!");  
    alert("How are you?");  
}
```

JS

- ❑ the above could be the contents of `example.js` linked to our HTML page
- ❑ statements placed into functions can be evaluated in response to user events

Event handlers

17

```
<element attributes onclick="function();">...
```

HTML

```
<button onclick="myFunction();">Click me!</button>
```

HTML

- JavaScript functions can be set as event handlers
 - ▣ when you interact with the element, the function will execute
- onclick is just one of many event HTML attributes we'll use
- but popping up an alert window is disruptive and annoying


CS330

- ▣ A better user experience would be to have the

Document Object Model (DOM)

18

- most JS code manipulates elements on an HTML page
- we can examine elements' state
 - ▣ e.g. see whether a box is checked
- we can change state
 - ▣ e.g. insert some new text into a div
- we can change styles
 - ▣ e.g. make a paragraph red

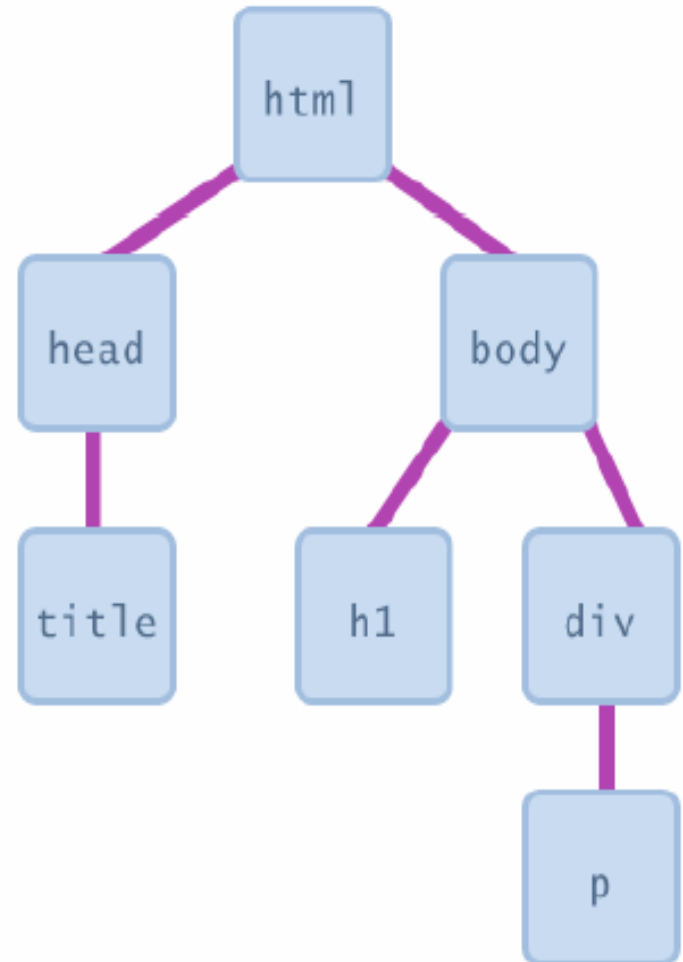

DOM element objects

19

HTML

```
<p>  
  Look at this octopus:  
    
  Cute, huh?  
</p>
```

DOM Element Object

Property	Value
tagName	"IMG"
<u>src</u>	"octopus.jpg"
alt	"an octopus"
id	"icon01"

JavaScript

```
var icon = document.getElementById("icon01");  
icon.src = "kitty.gif";
```

Accessing elements:

document.getElementById

20

```
var name = document.getElementById("id");
```

JS

```
<button onclick="changeText();">Click me!</button>  
<span id="output">replace me</span>  
<input id="textbox" type="text" />
```

HTML

```
function changeText() {  
    var span = document.getElementById("output");  
    var textBox = document.getElementById("textbox");  
  
    textBox.style.color = "red";  
  
}
```

JS

Accessing elements:

```
document.getElementById
```

21

- ❑ `document.getElementById` returns the DOM object for an element with a given id
- ❑ can change the text inside most elements by setting the `innerHTML` property
- ❑ can change the text in form controls by setting the `value` property

Changing element style:

`element.style`

22

Attribute	Property or style object
color	color
padding	padding
background-color	backgroundColor
border-top-width	borderTopWidth
Font size	fontSize
Font famiy	fontFamily

Prettify

23

```
function changeText() {  
    //grab or initialize text here  
  
    // font styles added by JS:  
    text.style.fontSize = "13pt";  
    text.style.fontFamily = "Comic Sans MS";  
    text.style.color = "red"; // or pink?  
}
```

JS

24

More Javascript Syntax

Variables

25

```
var name = expression;
```

JS

```
var clientName = "Connie Client";  
var age = 32;  
var weight = 127.4;
```

JS

- variables are declared with the `var` keyword (case sensitive)
- types are not specified, but JS does have types ("loosely typed")
 - ▣ `Number`, `Boolean`, `String`, `Array`, `Object`, `Function`, `Null`, `Undefined`
 - ▣ can find out a variable's type by calling `typeof`

Number type

26

```
var enrollment = 99;  
var medianGrade = 2.8;  
var credits = 5 + 4 + (2 * 3);
```

JS

- integers and real numbers are the same type (no int vs. double)
- same operators: + - * / % ++ -- = += -= *= /= %=
- similar precedence to Java
- many operators auto-convert types: "2" * 3 is 6

Comments (same as Java)

27

```
// single-line comment  
/* multi-line comment */
```

JS

- identical to Java's comment syntax
- recall: 4 comment syntaxes
 - HTML: `<!-- comment -->`
 - CSS/JS/PHP: `/* comment */`
 - Java/JS/PHP: `// comment`
 - PHP: `# comment`

Math object

28

```
var rand1to10 = Math.floor(Math.random() * 10 + 1);  
var three = Math.floor(Math.PI);
```

JS

- **methods:** abs, ceil, cos, floor, log, max, min, pow, random, round, sin, sqrt, tan
- **properties:** E, PI

Special values: null and undefined

29

```
var ned = null;
var benson = 9;
// at this point in the code,
// ned is null
// benson's 9
// caroline is undefined
```

JS

- `undefined` : has not been declared, does not exist
- `null` : exists, but was specifically assigned an empty or null value
- Why does JavaScript have both of these?

Logical operators

30

- `>` `<` `>=` `<=` `&&` `||` `!` `==` `!=` `===` `!==`
- most logical operators automatically convert types:
 - `5 < "7"` is true
 - `42 == 42.0` is true
 - `"5.0" == 5` is true
- `===` and `!==` are strict equality tests; checks both type and value
 - `"5.0" === 5` is false

if/else statement (same as Java)

31

```
if (condition) {  
    statements;  
} else if (condition) {  
    statements;  
} else {  
    statements;  
}
```

JS

- identical structure to Java's if/else statement
- JavaScript allows almost anything as a condition

Boolean type

32

```
var iLike190M = true;
var ieIsGood = "IE6" > 0; // false
if ("web devevelopment is great") { /* true */ }
if (0) { /* false */ }
```

JS

- any value can be used as a Boolean
 - ▣ "falsey" values: 0, 0.0, NaN, "", null, and undefined
 - ▣ "truthy" values: anything else
- converting a value into a Boolean explicitly:
 - ▣ `var boolValue = Boolean(otherValue);`
 - ▣ `var boolValue = !! (otherValue);`

for loop (same as Java)

33

```
var sum = 0;
for (var i = 0; i < 100; i++) {
    sum = sum + i;
}
```

JS

```
var s1 = "hello";
var s2 = "";
for (var i = 0; i < s.length; i++) {
    s2 += s1.charAt(i) + s1.charAt(i);
}
// s2 stores "hheelllloo"
```

JS

while loops (same as Java)

34

```
while (condition) {  
    statements;  
}
```

JS

```
do {  
    statements;  
} while (condition);
```

JS



- break and continue keywords also behave as in Java

Popup boxes

35

```
alert("message"); // message  
confirm("message"); // returns true or false  
prompt("message"); // returns user input string
```

JS

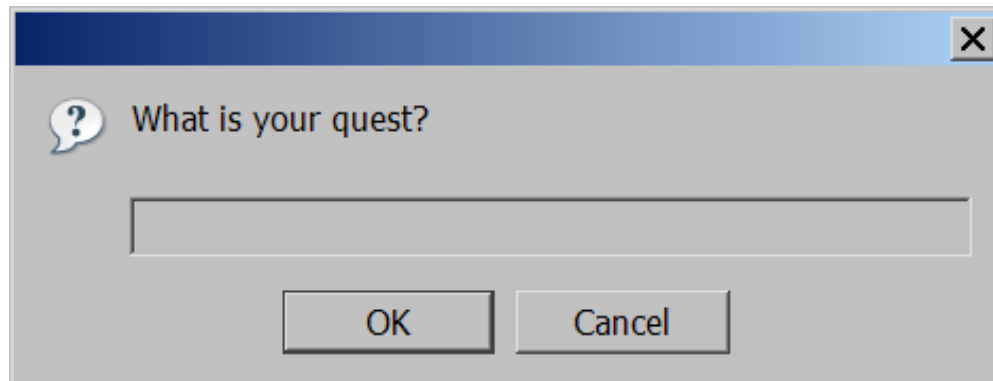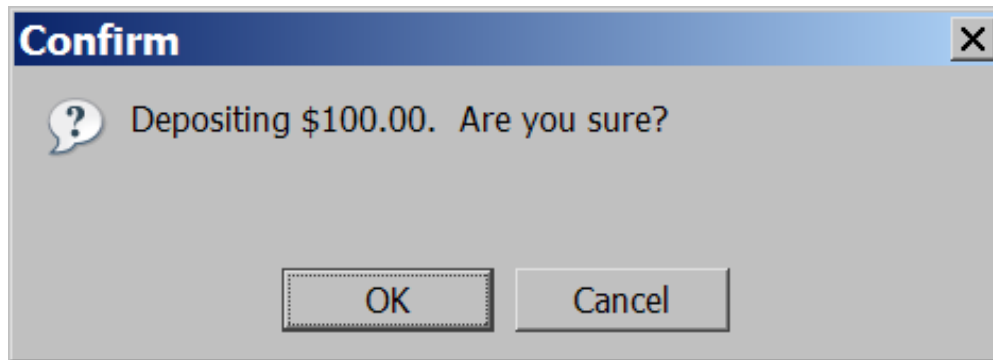

Arrays

36

```
var name = []; // empty array
var name = [value, value, ..., value]; // pre-filled
name[index] = value; // store element
```

JS

```
var ducks = ["Huey", "Dewey", "Louie"];
var stooges = []; // stooges.length is 0
stooges[0] = "Larry"; // stooges.length is 1
stooges[1] = "Moe"; // stooges.length is 2
stooges[4] = "Curly"; // stooges.length is 5
stooges[4] = "Shemp"; // stooges.length is 5
```

JS

Array methods

37

```
var a = ["Stef", "Jason"]; // Stef, Jason
a.push("Brian"); // Stef, Jason, Brian
a.unshift("Kelly"); // Kelly, Stef, Jason, Brian
a.pop(); // Kelly, Stef, Jason
a.shift(); // Stef, Jason
a.sort(); // Jason, Stef
```

JS

- array serves as many data structures: list, queue, stack, ...
- **methods:** concat, join, pop, push, reverse, shift, slice, sort, splice, toString, unshift
 - ▣ push and pop add / remove from back
 - ▣ unshift and shift add / remove from front
 - ▣ shift and pop return the element that is removed

String type

38

```
var s = "Connie Client";  
var fName = s.substring(0, s.indexOf(" ")); // "Connie"  
var len = s.length; // 13  
var s2 = 'Melvin Merchant';
```

JS

- **methods:** charAt, charCodeAt, fromCharCode, indexOf, lastIndexOf, replace, split, substring, toLowerCase, toUpperCase
 - ▣ charAt returns a one-letter String (there is no char type)
- length property (not a method as in Java)
- Strings can be specified with "" or ''
- concatenation with + :
 - 1 + 1 is 2 but "1" + 1 is "11"

More about String

39

- escape sequences behave as in Java: `' \" \& \n \t \`
- converting between numbers and Strings:

```
var count = 10;
var s1 = "" + count; // "10"
var s2 = count + " bananas, ah ah ah!"; // "10 bananas, ah
ah ah!"
var n1 = parseInt("42 is the answer"); // 42
var n2 = parseFloat("booyah"); // NaN
```

JS

- accessing the letters of a String:

```
var firstLetter = s[0]; // fails in IE
var firstLetter = s.charAt(0); // does work in IE
var lastLetter = s.charAt(s.length - 1);
```

JS

Splitting strings: split and join

40

```
var s = "the quick brown fox";  
var a = s.split(" "); // ["the", "quick", "brown", "fox"]  
a.reverse(); // ["fox", "brown", "quick", "the"]  
s = a.join("!"); // "fox!brown!quick!the"
```

JS

- split breaks apart a string into an array using a delimiter
 - ▣ can also be used with regular expressions (seen later)
- join merges an array into a single string, placing a delimiter between them